



KEY FEATURES

- PASSIVE 2 X 21" **NEODYMIUM** SPEAKERS
- LOW PROFILE COMPACT DESIGN
- ENCLOSURE CONSTRUCTION 18MM PLYWOOD
- RUGGED DURABLE PAINTING FINISH
- HEAVY DUTY POWER-COATED 1.5MM STEEL GRILLE
- SPEAKON CONNECTORS





DRIVER NOMINAL SPECIFICATIONS

Nominal Diameter for each speaker	530mm(21 inch)
Overall Diameter	542mm (21.34 inch)
Bold Circle Diameter	517mm(20.35 inch)
Baffle Cutout Diameter	492mm(19.37 inch)
Depth	245mm(9.65 inch)
Flange and gasket Thickness	10mm(0.39 inch)
Net Weight for Each Speaker	9.26 Kg
Voice Coil Diameter	125mm(4.92 inch)
Winding Material	Cu
Former Material	Glass Fiber
Winding Depth	31mm(1.22inch)
Magnet	NEODYMIUM SLUG
Basket Material	Aluminium
Cone Surround (3)	Acordion (4 Waves)



TECHNICAL PARAMETERS

Nominal Impedance	4 Ohm
Minimum Impedance	3.5 Ohm
AES Power Handling (1)	2500W
MAXIMUM POWER HANDLING (2)	4000W
SENSITIVITY (1W/1m)	109db
Frequency Range	32Hz - 1KHz
Subwoofer Total Weight	129 lb / 58.5 Kg
Connector Type	Speakon NL2 (2)

FREQUENCY RESPONSE

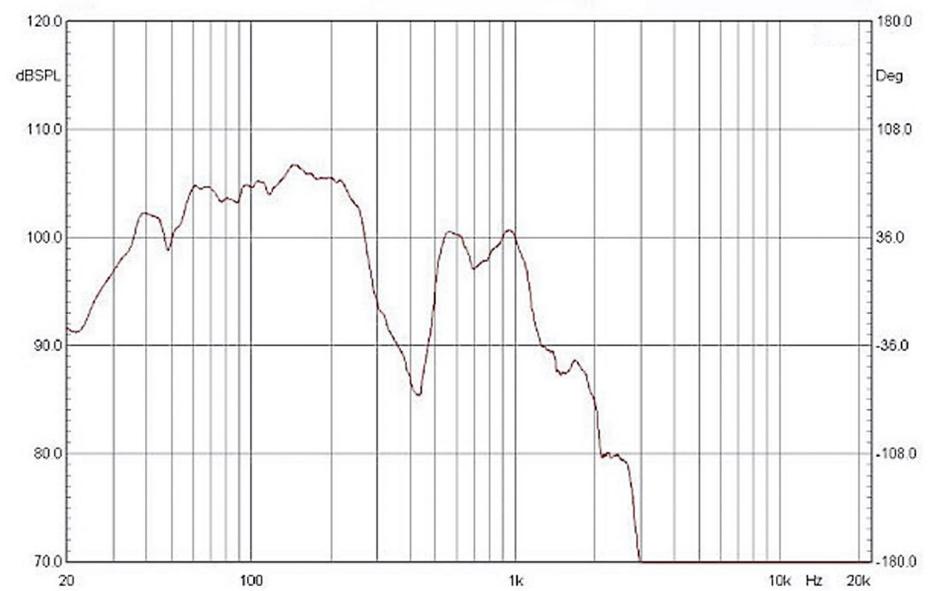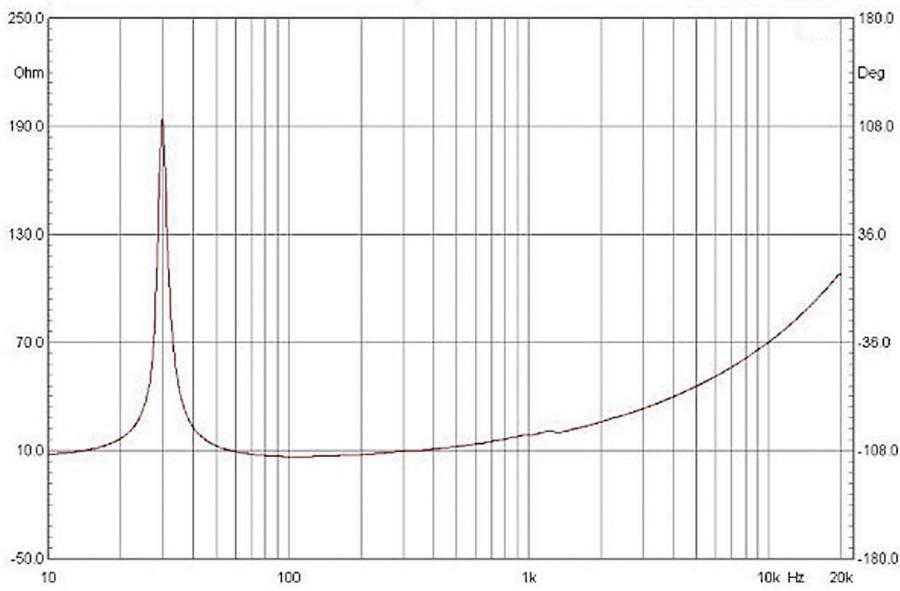

TECHNICAL DRAWINGS

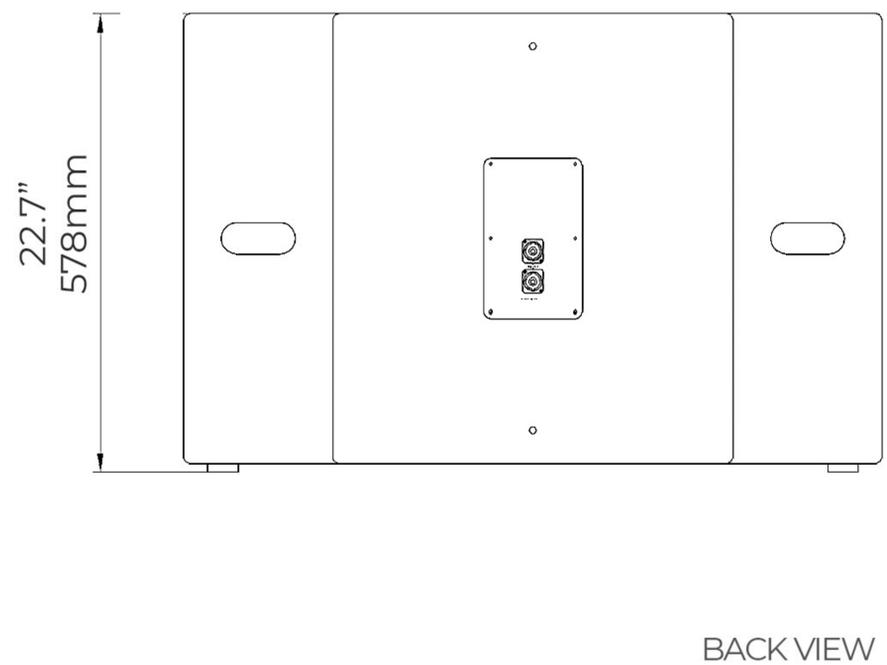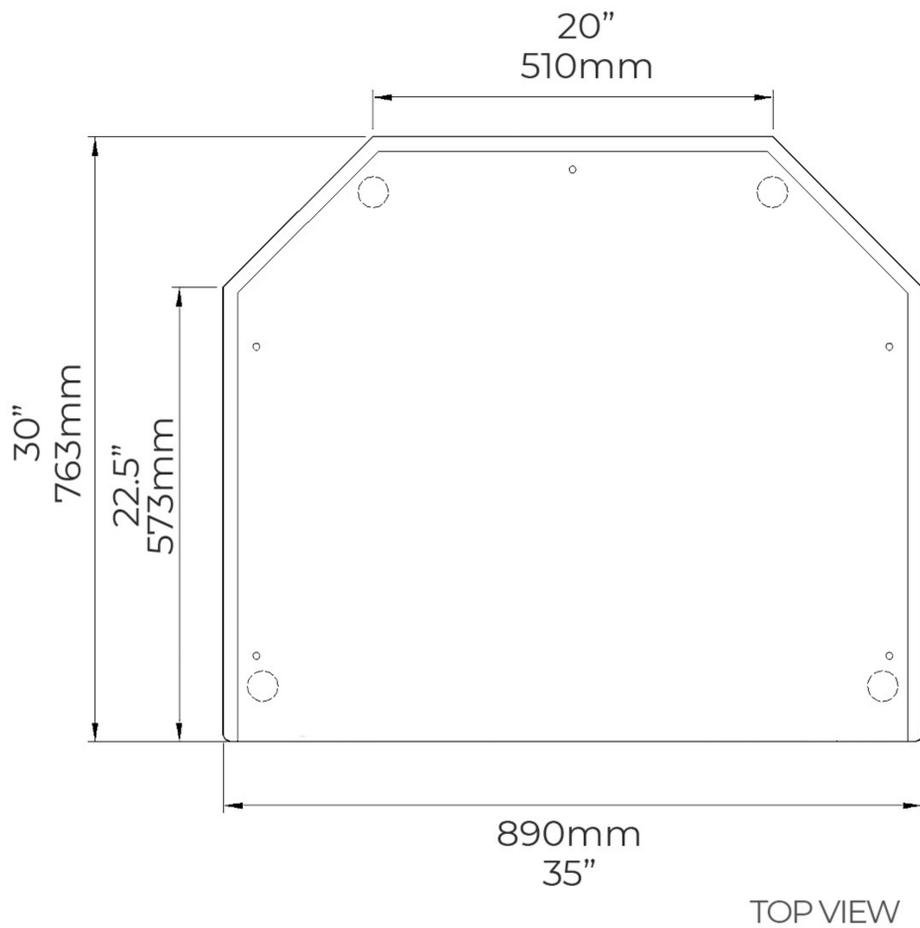

ALL DIMENSIONS ARE IN MILLIMETERS.