

KEY FEATURES



- 12 INCH SPEAKER
- 1 INCH DRIVER
- ULTRA LOW DISTORTION SYSTEM
- LOW PROFILE COMPACT DESIGN
- ENCLOSURE CONSTRUCTION 15MM PLYWOOD
- RUGGED DURABLE PAINTING FINISH
- HEAVY DUTY POWDER-COATED 1.5 STEEL GRILLE




TECHNICAL PARAMETERS

TYPE	12" TWO WAY PASSIVE FULL RANGE SPEAKER
Drivers	LF:12"speaker, 190mm magnet, 3" silvering aluminum voice coil HF:1x1.75" diaphragm driver , protector for over circuit/voltage
Frequency Range	55Hz-19KHz
Power Handling capacity	450W RMS
Sensitivity	97dB /1W /1m
Rated impedance	8Ω
SLP	122dB continue, 128db peak
Coverage (H x V)	50-100 x 50 degree
Construction	15mm Birch plywood cabinet. Black color
Dimensions	14.3" x 23.6" x 15.3" / 364mm x 600mm x 391mm
Net Weight	47.3 lb / 21.5Kg


FREQUENCY RESPONSE

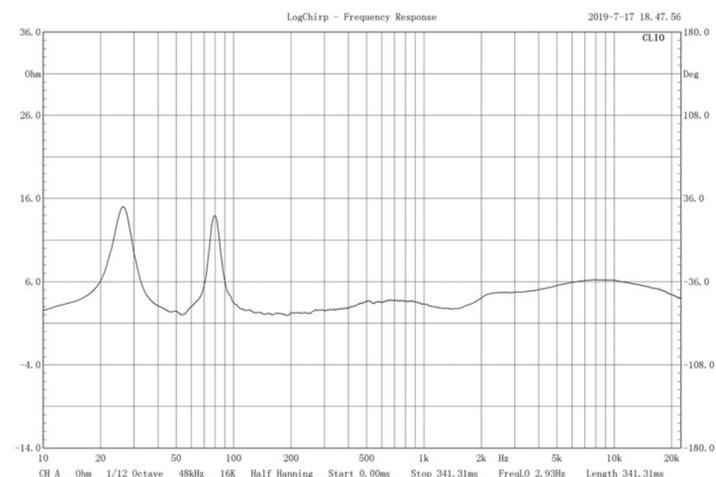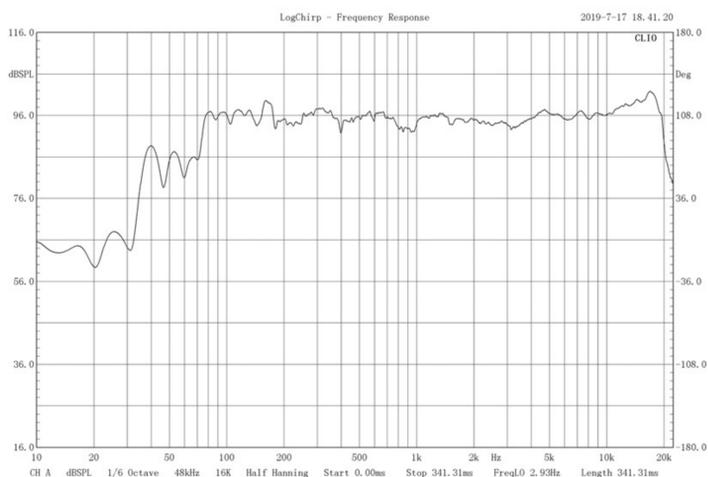

TECHNICAL DRAWINGS

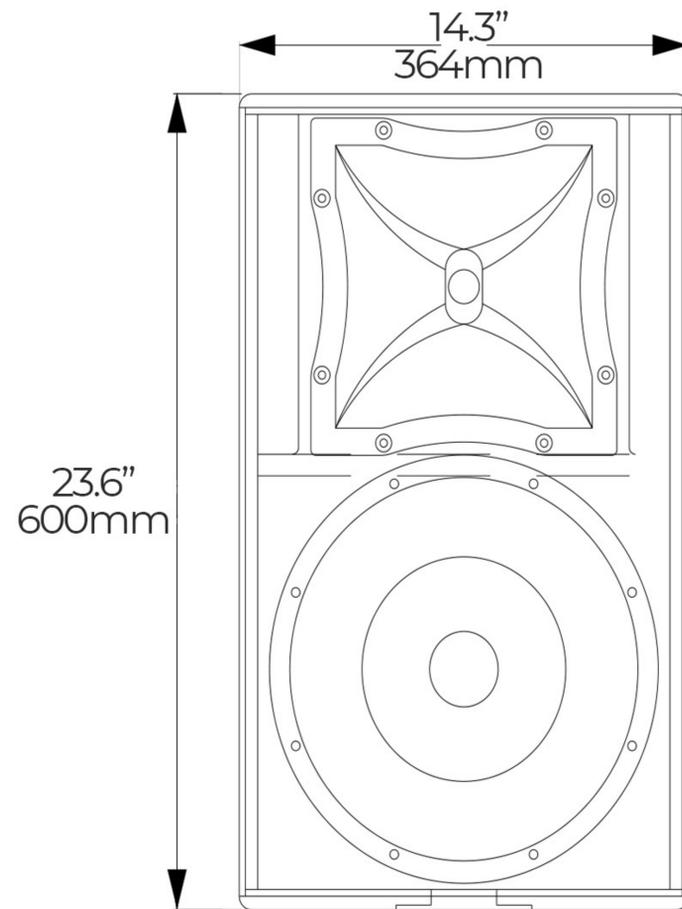

FRONT VIEW

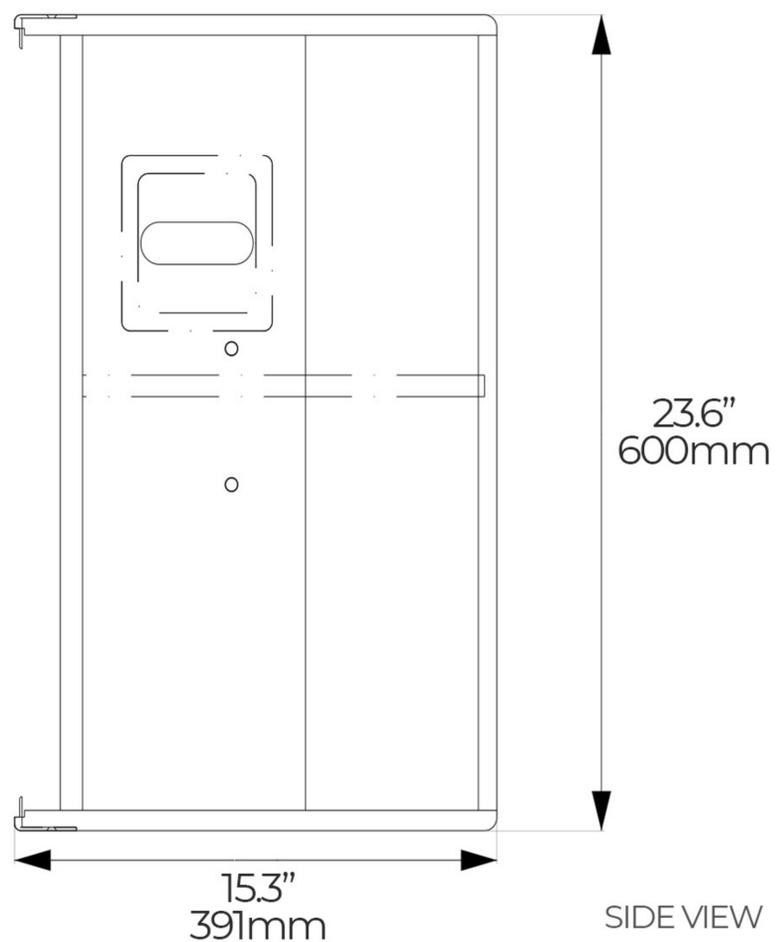

SIDE VIEW

ALL DIMENSIONS ARE IN MILLIMETERS.