

## KEY FEATURES



- 6 INCH SPEAKER
- 1 INCH DRIVER
- ULTRA LOW DISTORTION SYSTEM
- LOW PROFILE COMPACT DESIGN
- 15MM WOODEN CABINET
- RUGGED DURABLE PAINTING FINISH
- HEAVY DUTY POWDER-COATED 1.5 STEEL GRILLE




## TECHNICAL PARAMETERS

TYPE	6.5" TWO WAY PASSIVE FULL RANGE SPEAKER
Drivers	LF:6.5" speaker, 100mm magnet, 30mm voice coil overheat-proof HF:1x1" diaphragm driver, Protection to overcurrent&over voltage
Frequency Range	75Hz-20KHz
Power Handling capacity	100W RMS
Sensitivity	93db / 1W / 1m
Rated impedance	8Ω
SLP	105db continue, 111db peak
Coverage	70 x 50 degree
Construction	15mm Plywood cabinet. Black painting
Dimensions	8.1" x 13.8" x 9.5" / 208mm x 351mm x 240mm
Net Weight	143.3 lb / 6.5Kg


## FREQUENCY RESPONSE

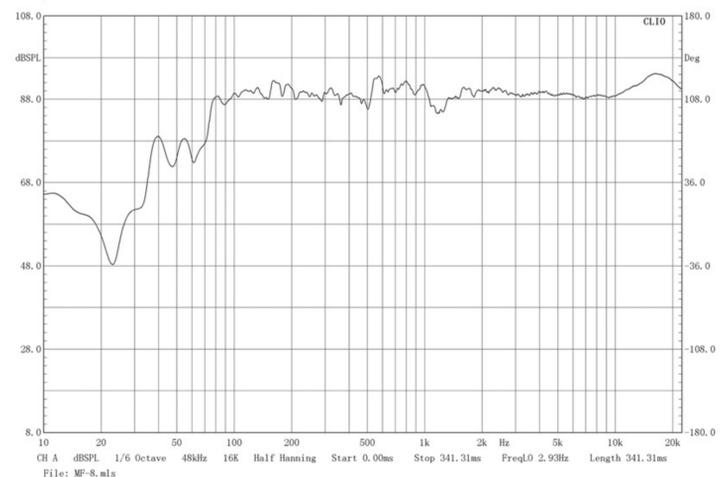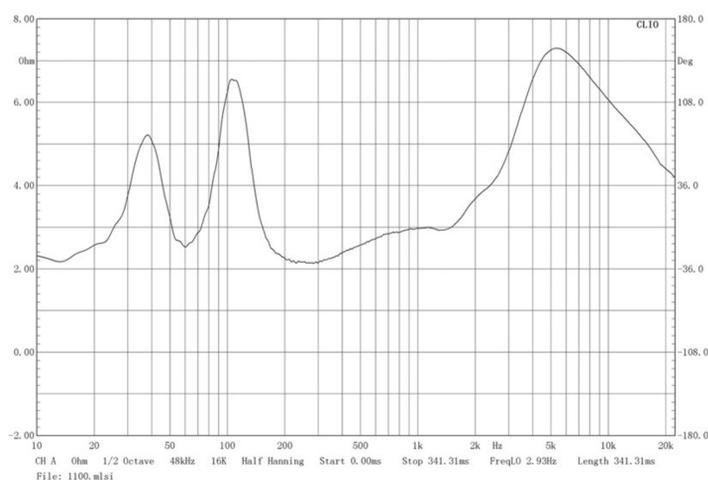

## TECHNICAL DRAWINGS

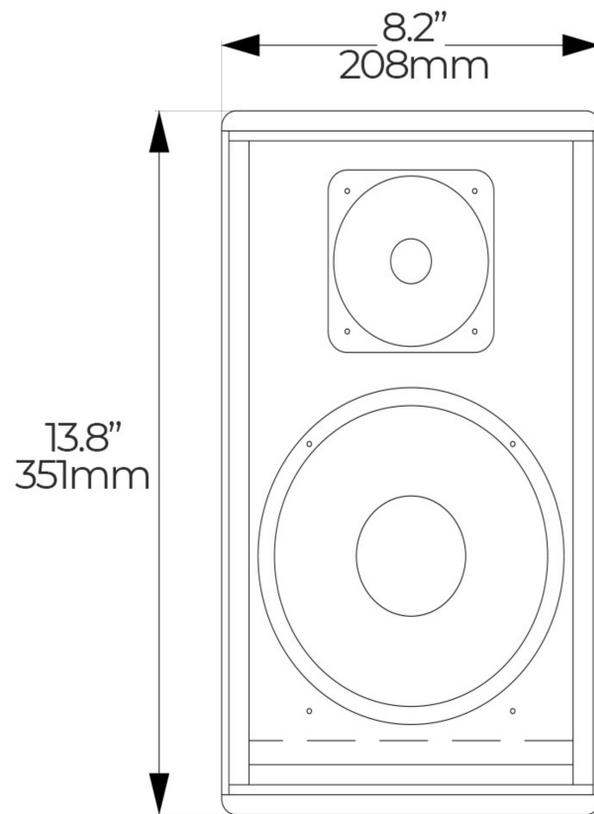

FRONT VIEW

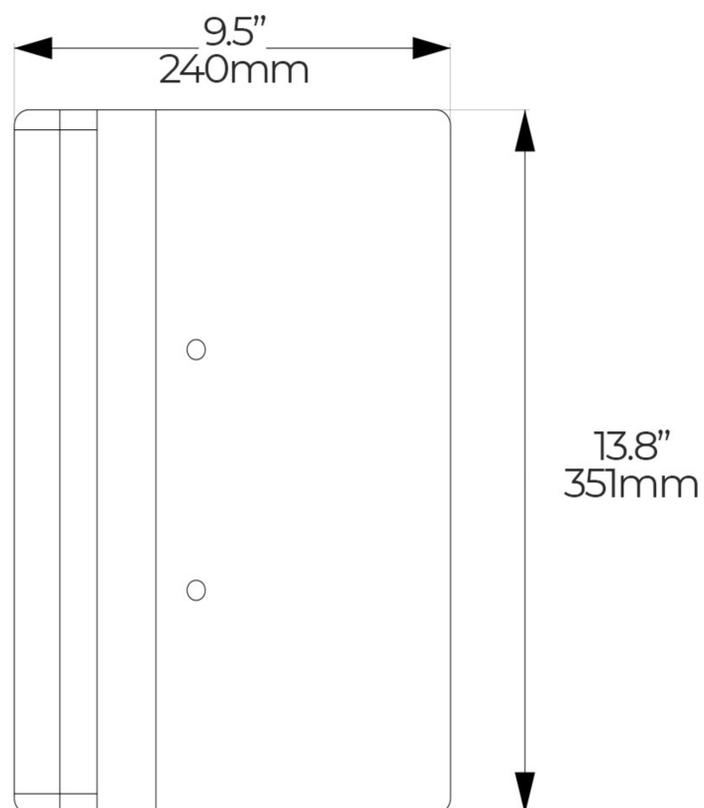

SIDE VIEW

ALL DIMENSIONS ARE IN MILLIMETERS.