




GA801-A PROFESSIONAL SERIES DESIGNED IN HOLLYWOOD

KEY FEATURES & TECHNICAL PARAMETERS



FREQ. RANGE: 68Hz - 20Khz
MAXIMUM SPL: 127 dB
HORIZONTAL COVERAGE ANGLE: 70°
VERTICAL COVERAGE ANGLE: 50°
RMS POWER HANDLING: 150 WATT
HPF CONTROL: 68Hz - 250Hz
INPUT CONNECTOR: XLR
LOOP OUT CONNECTOR: XLR
LOW FREQ. TRANSDUCER: 8" WOOFER
HIGH FREQ. TRANSDUCER: 1" DRIVER
INPUT POWER: 110 - 250V
PAINT: TEXTURIZED WHITE / BLACK
16 FLY POINTS FOR RIGGING
POLE MOUNT READY
WALL MOUNT BRACKET INCLUDED
DIMENSIONS 16.1" x 9.4" x 10.9" / 410mm x 240mm x 278mm
NET WEIGHT 24.25 lb / 11Kg



FREQUENCY RESPONSE

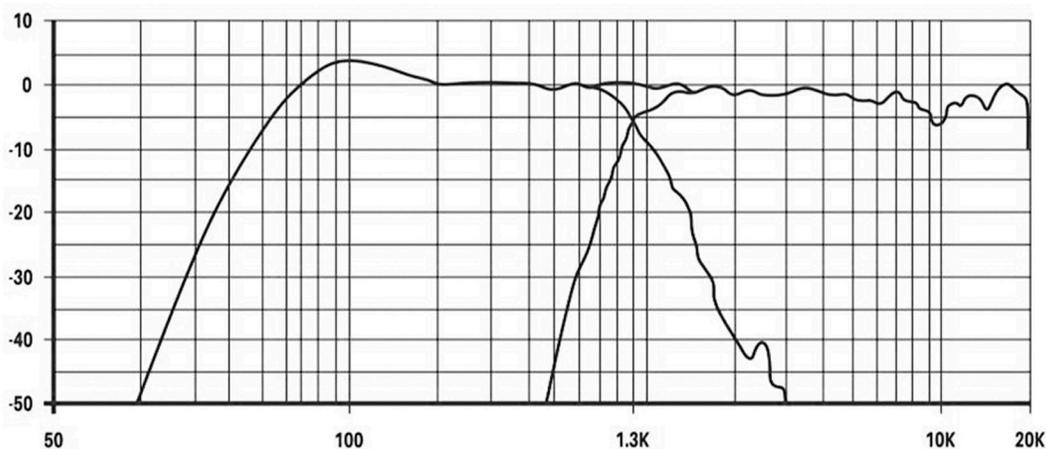

TECHNICAL DRAWINGS

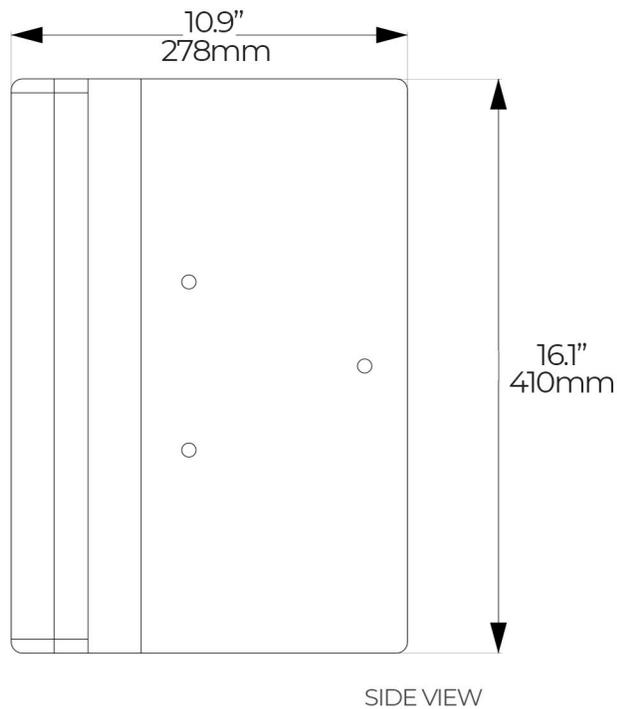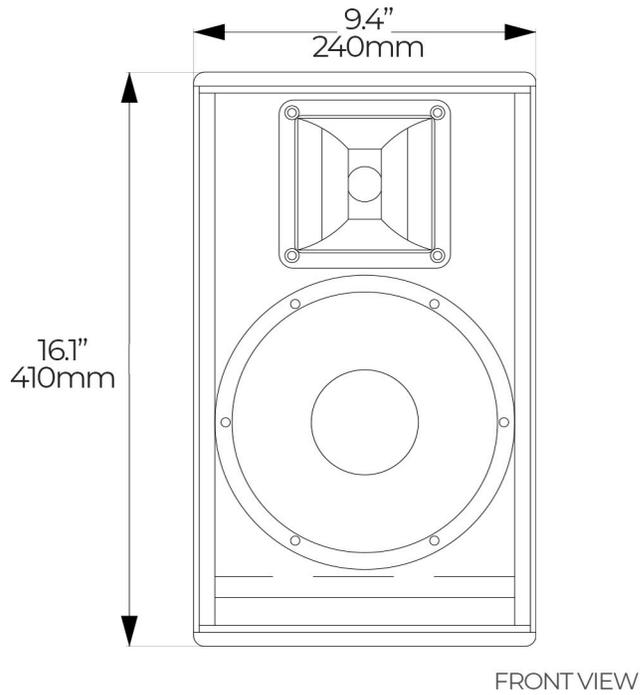

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS.